




Specifications:

Diameter air pipe mm	Model	Colour code curve	Power output kW	Phases	r.p.m.	Starting method	Dry weight kg without cable	Cable m
150	150TRN440	● 1	40	3	1450	star/delta	635,0	20





**Submersible Aerators - self priming
- low maintenance - easy
installation**

Air Emission Volume - Water Depth Curve
(Air Emission Volume at 20°C)

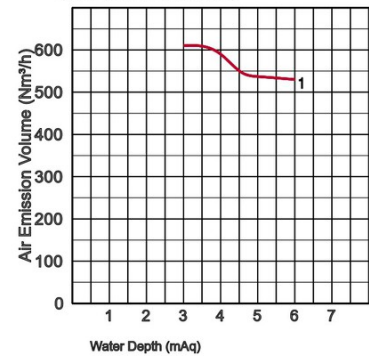

ø Air inlet		150mm	
Pumping Fluid	Temperature	0-40°C	
	Type of Fluid	Municipal sewage, sewage of food industry	
Pump	Components	Impeller	Vortex impeller
		Shaft Seal	Double mechanical seal
		Bearings	Shielded ball bearings
	Material	Impeller	Stainless steel DIN-GX12Cr14
		Suction Plate	Stainless steel DIN-GX12Cr14
		Guide vane	Grey iron casting EN-GJL-200
		Air inlet	Grey iron casting EN-GJL-200
Shaft Seal	Silicon carbide in oil bath		
Motor	Type, Poles	Induction motor, 4 poles, IP68	
	Lubrication	Turbine oil (ISO VG32)	
	Insulation	Insulation class F	
	Motor Protector (built-in)	Circle thermal cut-out	
	Phase / Voltage	3-phase / 400V / 50Hz / s.d.	
	Material	Casing	Grey iron casting EN-GJL-200
		Shaft	Stainless steel EN-X20Cr13
Cable		Rubber, H07RN-F	
Air pipe connection		Inside thread, flange	



Model	A	A1	B	D	D1	H	SA	SB	SC	SD	W1
150TRN440	980	410	452	1050	280	1459	448	370	740	863	269