

Vortex impeller




PNI 1-phase
50Hz

Specifications:


Model	Colour code curve	Bore mm	Power output kW	Phases	r.p.m.	Head max. m	Capacity max. l/min	Starting method	Dry weight kg without cable	Impeller passage mm	
50PNI2.4S	●	1	50	0,4	1	2850	12,0	280	condensor	7,4	10



Discharge bore mm		50mm		
Pumping Fluid	Temperature	0-40°C		
	Type of Fluid	Municipal sewage, water with solids		
Pump	Components	Impeller	Vortex impeller	
		Shaft Seal	Double mechanical seal	
		Bearings	Shielded ball bearings	
	Material	Impeller	Glass fibre reinforced plastic	
		Upper casing	Glass fibre reinforced plastic	
		Lower casing	Plastic	
	Shaft Seal	Silicon carbide in oil bath		
Motor	Type, Poles		Induction motor, 2 poles, IP68	
	Lubrication		Turbine oil (ISO VG32)	
	Insulation		Insulation class E	
	Motor Protector (built-in)		Miniature protector	
	Phase / Voltage		Single phase 230V / 50Hz	
	Material	Casing	Stainless steel EN-X5CrNi18-10	
Shaft		Stainless steel EN-X6Cr13		
Cable		Rubber, 10m H07RN-F		
Discharge Connection		Inside thread, flange		
Optional Accessories		Guide rail fitting "TOK" for small pumps		

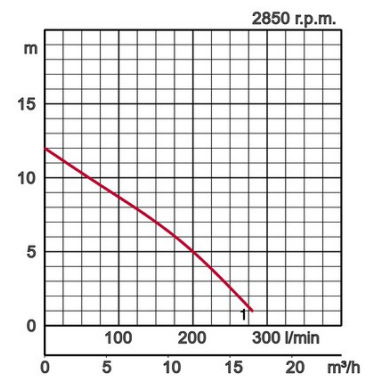

Model	A	A1	A2	B	D	D1	D2	H	W1	W2
50PNI2.4S	241	120	81	102	246	76	170	360	110	325

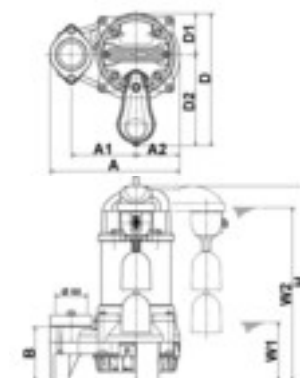

W1: lowest running water level