




Specifications:

Diameter air pipe mm	Model	Colour code curve	Power output kW	Phases	r.p.m.	Starting method	Dry weight kg without cable	Cable m	
32	32TRN21.5		1	1,5	3	2850	direct	55,0	10



**Submersible Aerators - self priming
- low maintenance - easy
installation**

Air Emission Volume - Water Depth Curve
(Air Emission Volume at 20°C)

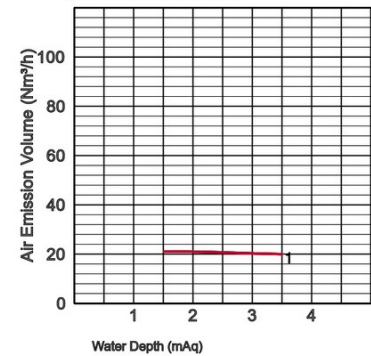

ø Air inlet		32mm	
Pumping Fluid	Temperature	0-40°C	
	Type of Fluid	Municipal sewage, sewage of food industry	
Pump	Components	Impeller	Vortex impeller
		Shaft Seal	Double mechanical seal
		Bearings	Shielded ball bearings
	Material	Impeller	Stainless steel DIN-GX12Cr14
		Suction Plate	Stainless steel DIN-GX12Cr14
		Guide vane	Grey iron casting EN-GJL-200
		Air inlet	Grey iron casting EN-GJL-200
		Shaft Seal	Silicon carbide in oil bath
Motor	Type, Poles	Induction motor, 2 poles, IP68	
	Lubrication	Turbine oil (ISO VG32)	
	Insulation	Insulation class F	
	Motor Protector (built-in)	Circle thermal cut-out	
	Phase / Voltage	3-phase / 400V / 50Hz / d.o.l.	
	Material	Casing	Grey iron casting EN-GJL-150
		Shaft	Stainless steel EN-X30Cr13
Cable		Rubber, H07RN-F	
Air pipe connection		Inside thread, flange	



Model	A	A1	B	D	D1	H	SA	SB	SC	W1
32TRN21.5	371	184	146	420	90	473	180	116	275	81