

Canal impeller with cutter mechanism





C 3-phase
50Hz

Specifications:

Model		Colour code curve	Dry weight kg without cable	
free standing	with guide rail fitting		free standing	with guide rail fitting
80C21.5	TOS80C21.5	● 1		



Discharge bore mm		80mm		
Pumping Fluid	Temperature	0-40°C		
	Type of Fluid	Wastewater and liquid carrying waste and foreign matters		
Pump	Components	Impeller	Non-clog impeller with cutter mechanism	
		Shaft Seal	Double mechanical seal	
		Bearings	Shielded ball bearings	
	Material	Impeller	Grey iron casting EN-GJL-200 with sintered tungsten carbide alloy tip	
		Casing	Grey iron casting EN-GJL-200	
		Suction Plate	Ductile iron casting EN-GJS-700-2	
Shaft Seal	Silicon carbide in oil bath			
Motor	Type, Poles	Induction motor, 2 poles, IP68		
	Lubrication	Turbine oil (ISO VG32)		
	Insulation	Insulation class E		
	Motor Protector (built-in)	Circle thermal cut-out		
	Phase / Voltage	3-phase / 400V / 50Hz / d.o.l.		
	Material	Casing	Grey iron casting EN-GJL-150	
		Shaft	Stainless steel EN-X30Cr13	
Cable		Rubber, 10m H07RN-F		
Discharge Connection		Inside thread, JIS10K flange		
Optional Accessories		Guide rail fitting "TOS" (guide support, duck foot bend, lifting chain) / Bend and stand set for free standing types		

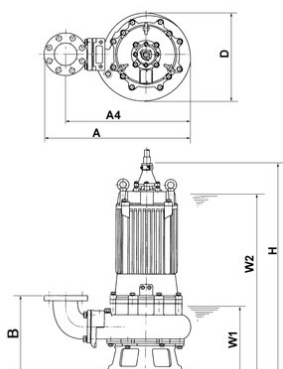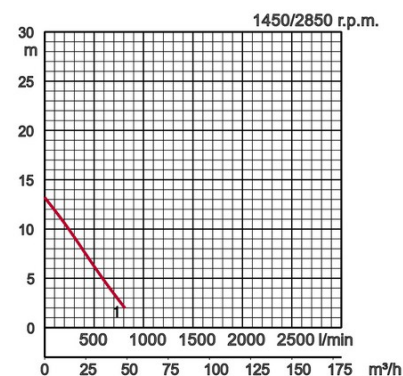

Model	A	A4	B	D	H	W1	W2
80C21.5	446	392	234	250	536	190	465

W1: lowest running water level

Updated 09/2017

Please mind: discharge bend, duck foot bend and stand set are accessories and must be ordered separately